



MS 15-100/T-EN54 black

- distinctive design
- excellent sound
- IP 33C



EN 54-24:2008
Ref. Nr.: 011-13
ID-Code: SAA-LS11
1438/CPR/0348

ic audio GmbH, Boehringerstraße 14a,
D-68307 Mannheim, Germany



CE-Symbol gemäß Richtlinie 93/68EWG

The compact monitor speaker impresses by a sophisticated design and by its powerful sound. Perfectly suitable for installations where high sound quality is needed.


The 15W powered speaker is equipped with a high quality 2-way system and a 100V transformer with 3 power adjustments. Also, the low impedance operation with 8 ohm is possible. The impact-resistant, UV-resistant ABS plastic housing in black assures enduring stability. For additional reliability, an integrated thermal fuse and the wetness impregnation of the speaker chassis is provided.

The speaker is also secured with protection class IP 33C against the risks of environmental influences. A comfortable connection of the speaker is made possible by a stable screw terminal with contact protection. Quick and easy mounting with wall mounting bracket.


Polar Diagrams

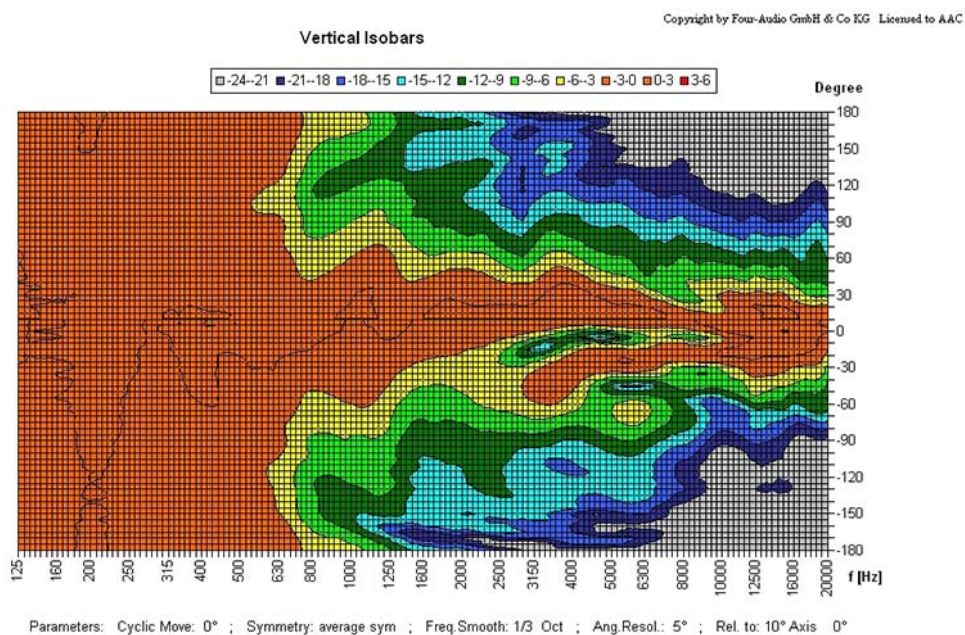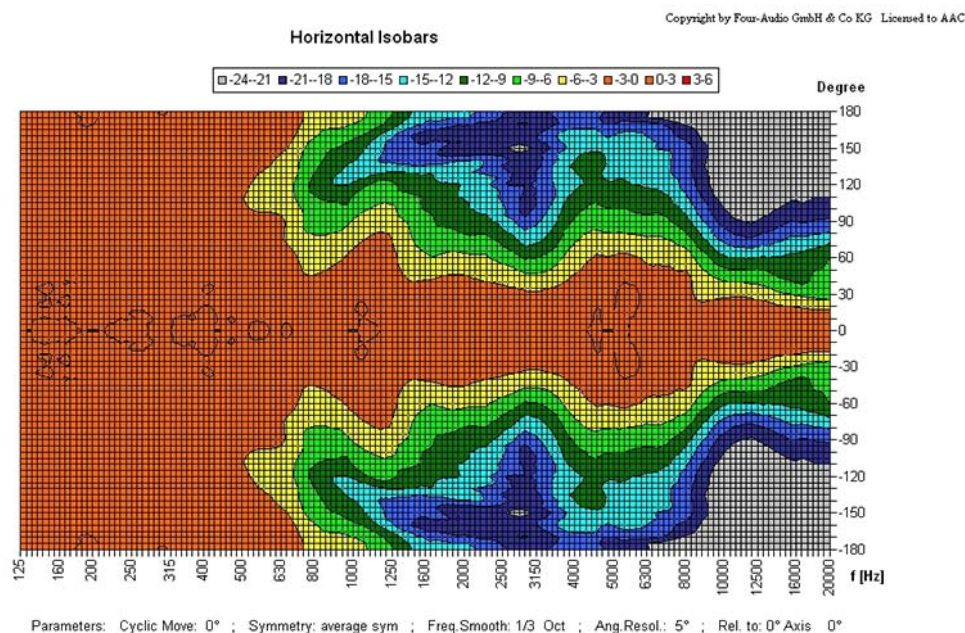

Frequency Response Diagrams

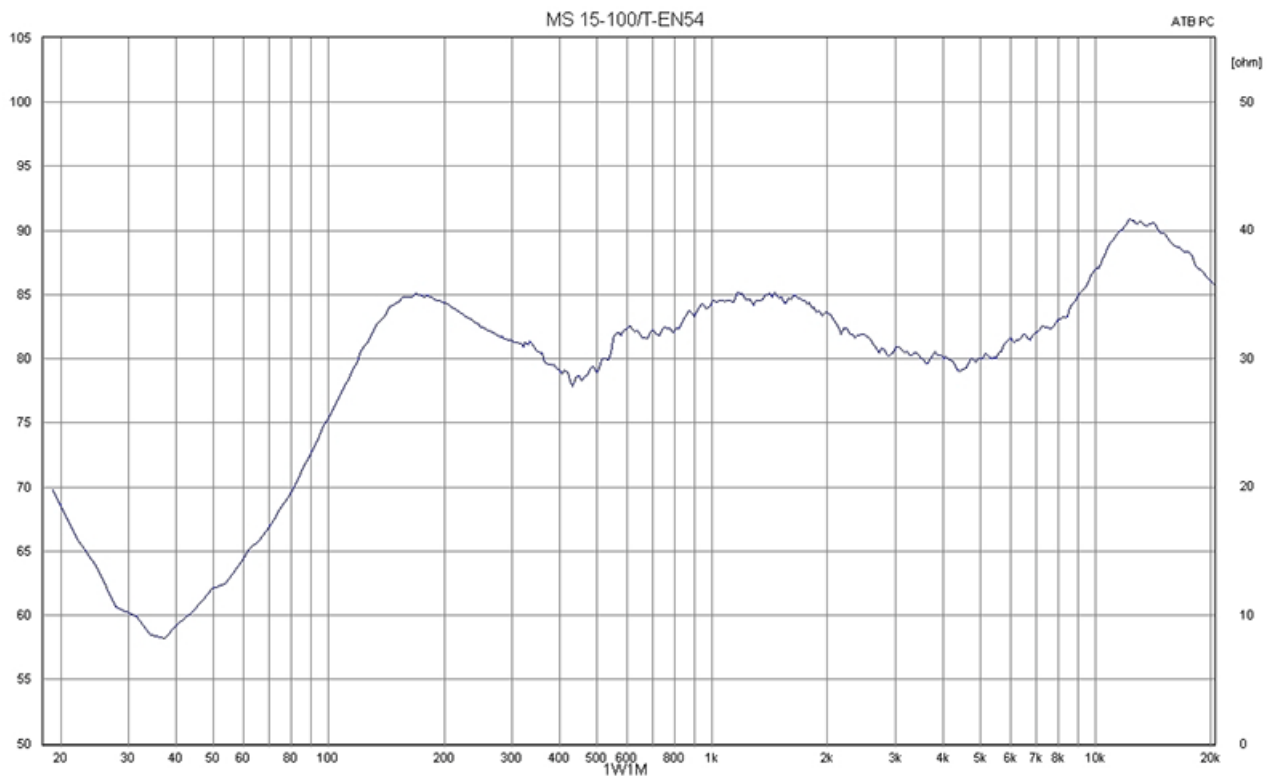

Technical Diagrams

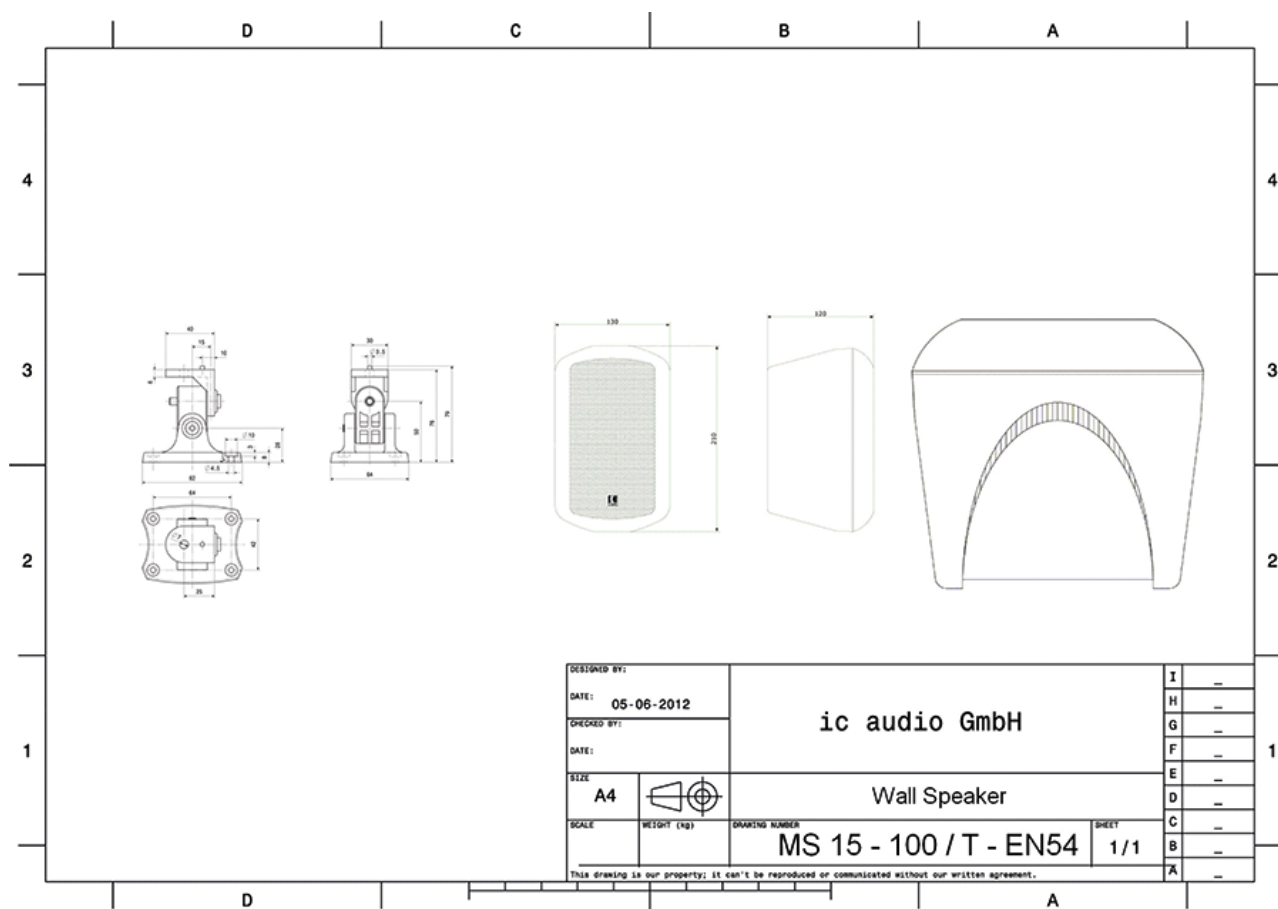

Technical Data (Electrical)

Description	MS 15-100/T-EN54 black
Power	15/7,5/3,75/1,8 (8ohm) W
Frequency Range	105 - 23.500 Hz
Frequency Response	82 - 23.500 Hz
SPL 1W/1m, peak	89,1 dB
SPL , 1W/4m, peak	77,1 dB
SPL Pmax/4m, peak	88,8 dB
Sensitivity EN54-24, 1W/4m	69,7 dB
Dispersion -6dB, 500Hz	360° (h) 360° (V)
Dispersion -6dB, 1KHz	186° (h) 186° (V)
Dispersion -6dB, 2KHz	132° (h) 115° (V)
Dispersion -6dB, 4KHz	147° (h) 197° (V)

Technical Data (Mechanical)

Dimensions	210x130x120 mm
Weight (net)	1,70 kg
Temperature range	-25 / +80 °C
Mounting	Swivel bracket
Connector	6-pin screw terminal
Maximum cable cross section	4,9mm ²
Max. cable cross section loop	2x1,2mm ²

Colour black

Product Attributes



Measurements according to DIN IEC 268-5 | RoHS compliant (2011/65/EU)



Article Nr.: 20122644

Packing Unit: 8

