



INLINE® USB4 CABLE, USB-C, ONE SIDE ANGLED, PD 240W, 8K60HZ, TPE, WHITE



- High quality USB4 cable with E-marker: power, data and video transmission
- Supports USB4 Gen.3x2 specification with data transfers up to 40 Gb/s
- Supports resolutions up to Ultra HD 8K@60Hz
- Supports Power Delivery 3.1 fast charging max. 240 W (48 V/5 A)
- Compatible with Thunderbolt 3
- Backward compatible with USB 3.2 and USB 2.0
- USB-C plug to USB-C plug
- Flexible cable with TPE jacket
- High-quality cable with twisted wire pairs
- Molded plugs with long bend protection for more flexibility and a long durability
- Suitable for monitors, hard drives, graphics cards, smartphones and other devices with USB-C connection
- The actual range of functions depends on the specification of the connected devices

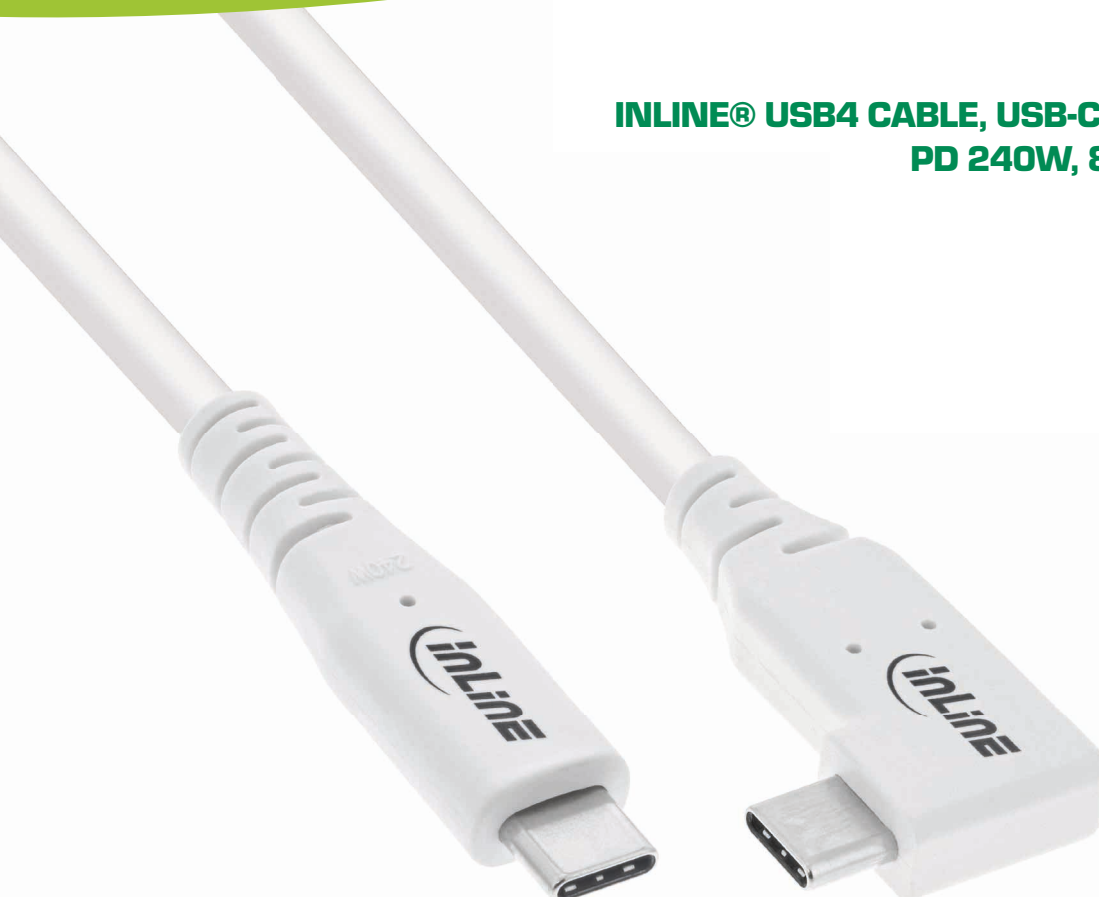

Art. Nr.	Length	EAN
35916W	0.50 m	4043718316892
35911W	1 m	4043718316908
35914W	1.50 m	4043718316915
35912W	2 m	4043718316922

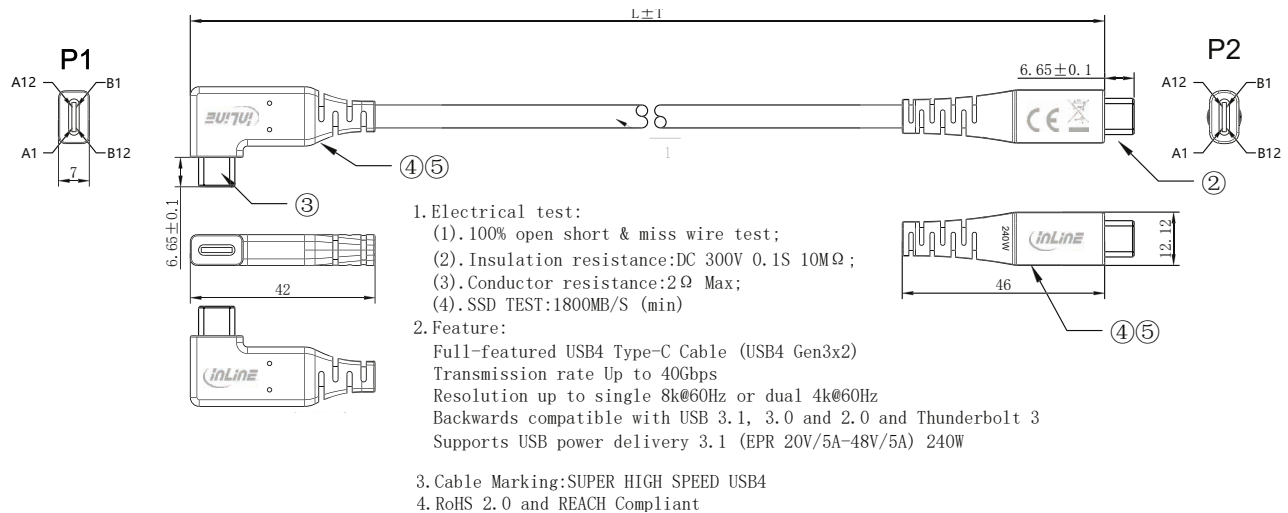

⑤	MOULDING	TPE White	2
④	INNER MOLD	LD-PE	2
③	USB TYPE C 2	USB 4 C/M Solder Type 90 Degree, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	1
②	USB TYPE C 1	USB 4 C/M Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating With E-Mark	1
①	CABLE	USB4.0 (31AWG BC*1P+AL+HM)*4P+32AWG BC*1P+32AWG BC*4C+D*2C+AD*2+B+TPE OD: 5.2±0.2 White	L±T
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y

PIN OUT

A1, B1, A12, B12	GND	A1, B1, A12, B12	GND
A4, B4, A9, B9	VBUS	A4, B4, A9, B9	VBUS
A5	CC	A5	CC
B5		B5	B5
A6	Dp1	A6	Dp1
A7	Dn1	A7	Dn1
A2	SSTXp1	B11	SSTXp1
A3	SSTXn1	B10	SSTXn1
B11	SSRXp1	A2	SSRXp1
B10	SSRXn1	A3	SSRXn1
B2	SSTXp2	A11	SSTXp2
B3	SSTXn2	A10	SSTXn2
A11	SSRXp2	B2	SSRXp2
A10	SSRXn2	B3	SSRXn2
A8	SBU1	B8	SBU1
B8	SBU2	A8	SBU2
SHELL		SHELL	