



Product Parameters		
Product Model	DS2719	DS2725
Pixel Pitch (mm)	1.9	2.5
Brightness (cd/m²)	800	
Refresh Rate (Hz)	3840	
Power Consumption (Max./Ave.)(W)	425/142	395/132
Cabinet Resolution (px)	320 × 180	240 × 135
Screen Resolution (px)	320 × 900	240 × 675
Overall dimensions (W × H)	624 × 1910mm (including base)	
Display size (W × H)(mm)	610 × 1715	
Weight of the whole screen(kg)	38kg (excluding base)	
Working Voltage	AC100~240V 50/60Hz	
Maintenance	Front Access	
IP Rating	IP30	
Operating Temperature/Humidity (°C/RH)	-10~40/10~80%	
Installation Mode	Foot Mounting / Hanging / Wall Mounting	

*All the data are from CVTE lab. The data above are subject to change without prior notice.

Partener QSTECH pentru România:

ELTEK Integrate Romania SRL
Bd. Pipera 1B, Cubic Center 7th Floor
077191 - Voluntari, Ilfov, Romania
Phone +40 21 200 64 55

E-mail Info@ELTEKIntegrate.com (Commercial)
 Service@ELTEKIntegrate.com (Service)
Website www.ELTEKIntegrate.com
 www.ELTEKStore.com



ELTEK



LED Poster

Intelligent HD LED Poster




QSTECH

A CVTE COMPANY



High Integration

- Integrated design, no need for extra external devices.
- Light-weight design brings slim display appearance.

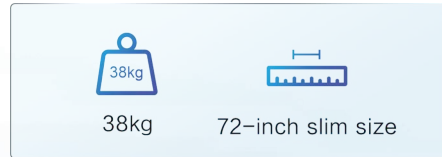


- Display Area:610×1715mm
- Poster Size:624×1910mm (including base)




Flexible Linking Options

Support using devices including mobile, tablets and PC to carry out display set-up swiftly; Intelligent remote control and large-scale cluster deployment will ease operation process.

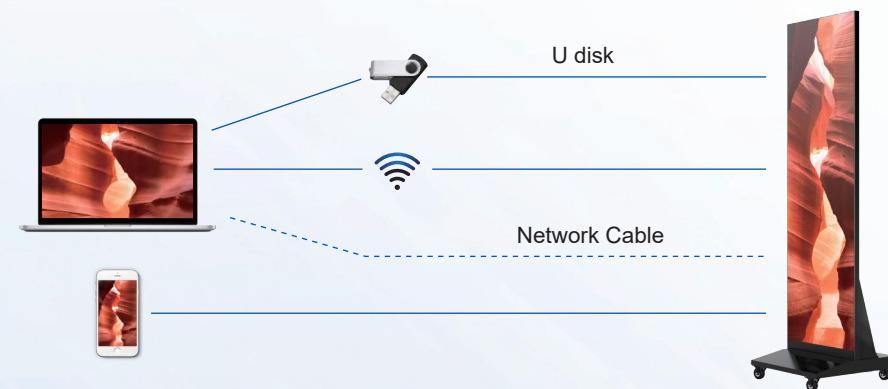

HD Display Effect

Pixel to pixel calibration for each unit, guaranteeing brightness and chroma uniformity; Nanosecond-level display technology is applied to ensure good dynamic image display effect.

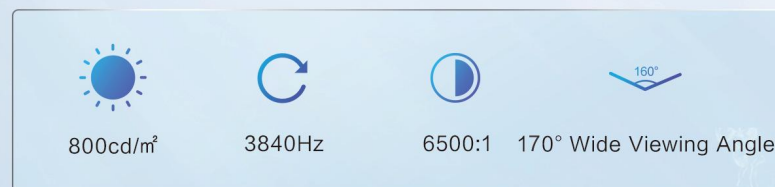

Phone Control led Poster

Publish contents anytime, anywhere. Send information, control devices, adjust brightness, volume just with your mobile device.



Pre-assembled Structure

Whole-Unit shipping | GOB optional | Plug-and-play.



Product compliance

The product complies with CCC, CE, FCC, and ETL certifications. The whole process meets the requirements of national RoHS.



Multi-units Splicing Available More Application Possibilities

No optical splicing Seam | Creative splicing applications | Simple disassembly.



Various Applications

- Different installation modes are available: Foot Mounting / Hanging / Wall-mounting.
- Simple installation process satisfies various application and installation scenarios.

