



SPECIFICATIONS				
Model	DF2712	DF2715	DF2718	DF2725
LED Type	SMD1010	SMD1212	SMD1515	SMD2121
Pixel Pitch (mm)	1.25	1.56	1.875	2.5
Cabinet Resolution (dots)	480×270	384×216	320×180	240×135
Cabinet Size (W×H×D)/(mm)	600×337.5×31	600×337.5×31	600×337.5×31	600×337.5×31
Module Size (mm)	300×168.75	300×168.75	300×168.75	300×337.5
Cabinet Weight (kg)	4.5±0.1	4.5±0.1	4.5±0.1	4.5±0.1
Contrast	6500: 1	6500: 1	6500: 1	6500: 1
Refresh Rate (Hz)	3840	3840	3840	3840
Brightness (nit)	600	600	800	800
Power Consumption (Max./Ave.) (W/m²)	368/110	310/93	385/116	420/126
Gray Scale (Bit)	16			
Viewing Angle (H/V °)	170/170			
LEDs Life Time (hrs.)	100000			
Cabinet Material	aluminum			
Maintenance	Front Access			
AC Input Voltage (V)	AC 100~240			
Operating Temperature/Humidity	- 10° ~40° / 10%~85% No condensation			

*All the data are from CVTE lab. The data above are subject to change without prior notice.

Partener QSTECH pentru România:

ELTEK Integrate Romania SRL
Bd. Pipera 1B, Cubic Center 7th Floor
077191 – Voluntari, Ilfov, Romania
Phone +40 21 200 64 55

E-mail Info@ELTEKIntegrate.com (Commercial)
 Service@ELTEKIntegrate.com (Service)
Website www.ELTEKIntegrate.com
 www.ELTEKStore.com



F27 Series
Highly integrated indoor display products






Simple and exquisite, stable operation

The power supply, receiving card, and hub board are integrated on one PCB, which greatly reduces the number of connections among electronic components and effectively improves the reliability and stability of product operation.

2-in-1 design/3-in-1 design | RoHS certified | EMC certified | Dual Redundancy Power and Signal Support

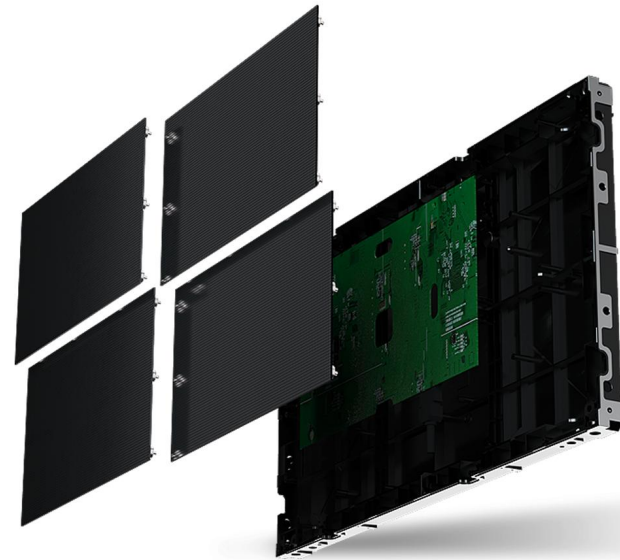

Vivid colors, delicate image quality

The F27 series adopts PWM driving chips, ensuring that the color and display details of the image are not lost even under low brightness conditions, and faithfully reproducing every frame detail.

16:9 standard ratio | 3840Hz refresh rate | High grayscale under low brightness


16:9 Standard Ratio



Slim design, simple but extraordinary

The cabinet is processed by high-precision CNC equipment and formed through integrated die-casting technology, easily achieving seamless optical splicing; the aluminum alloy cabinets allows for better heat dissipation of the screen, effectively extending its use life; With a high-integration design, the cabinet has a thickness of only 31mm.

31mm thickness | Full front access | Plugging Connection

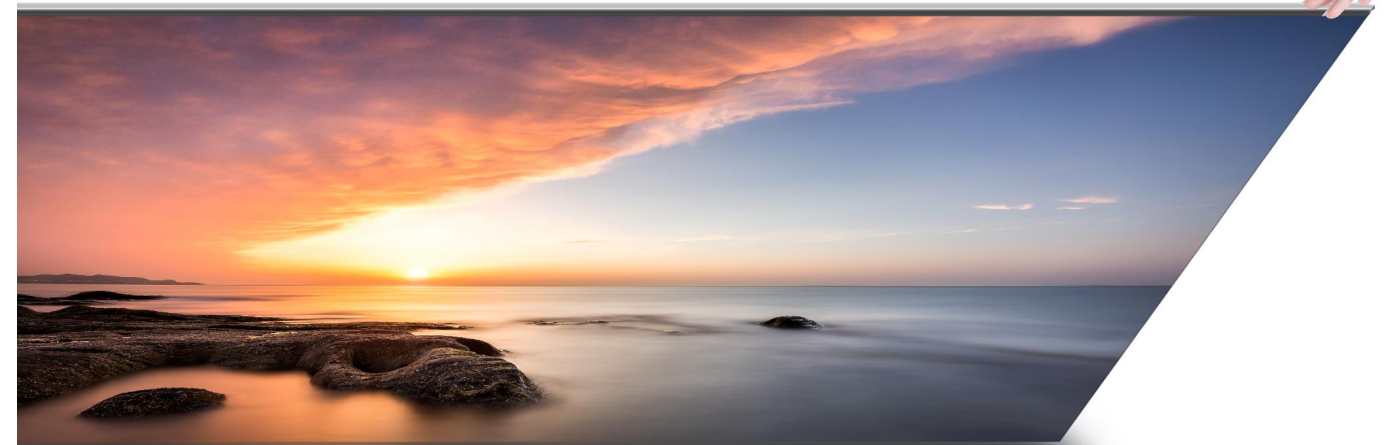

Multi system supported, easy to operate

The F27 series utilizes dynamic low-power technology to eliminate unnecessary power consumption, effectively reducing the overall temperature of the display screen.

Nova system | QSTECH system | Energy saving

*Android is built in QSTECH system.
The product's UI interface is subject to the actual products available for sale.

