



SPECIFICATIONS				
Model	DH3112	DH3115	DH3118	DH3125
Physical Parameter				
LED Type	SMD	SMD	SMD	SMD
Pixel Pitch (mm)	1.2	1.5	1.8	2.5
Cabinet Size(W×H×D)/(mm)	640×480×31	640×480×31	640×480×31	640×480×31
Cabinet Resolution	512×384	416×312	348×261	256×192
Cabinet Weight(kg)	6.2±0.1	6.2±0.1	6.2±0.1	6.2±0.1
Cabinet Material	Aluminium Alloy	Aluminium Alloy	Aluminium Alloy	Aluminium Alloy
Optical Parameter				
Brightness (nit)	≥600	≥600	≥700	≥800
Refresh Rate (Hz)	3840			
Gray Scale (bit)	13			
Viewing Angle (H/V°)	170° /170°			
Electrical Parameter				
Power Consumption(Max./Avg.)/(W/m²)	423/141	293/98	358/119	355/120
Environmental Parameter				
Operating Temperature (℃)	-10~+40			
Operating Humidity(RH)	10%~80% No Condensation			
Maintenance	Front			
Sytem	Nova			

All specifications are subject to change without prior notice.
Note: Specifications are for reference only and are subject to change without notice.



Partener QSTECH pentru România:

ELTEK Integrate Romania SRL
Bd. Pipera 1B, Cubic Center 7th Floor
077191 – Voluntari, Ilfov, Romania
Phone +40 21 200 64 55

E-mail Info@ELTEKIntegrate.com (Commercial)
 Service@ELTEKIntegrate.com (Service)
Website www.ELTEKIntegrate.com
 www.ELTEKStore.com



H31 Series

Indoor Fine Pixel Pitch Product




A CVTE COMPANY



Simple and exquisite, stable operation

The power supply, receiving card, and hub board are integrated on one PCB, which greatly reduces the number of connections among electronic components and effectively improves the reliability and stability of product operation.

2-in-1 design/3-in-1 design | RoHS certified | EMC certified | Dual Redundancy Power and Signal Support

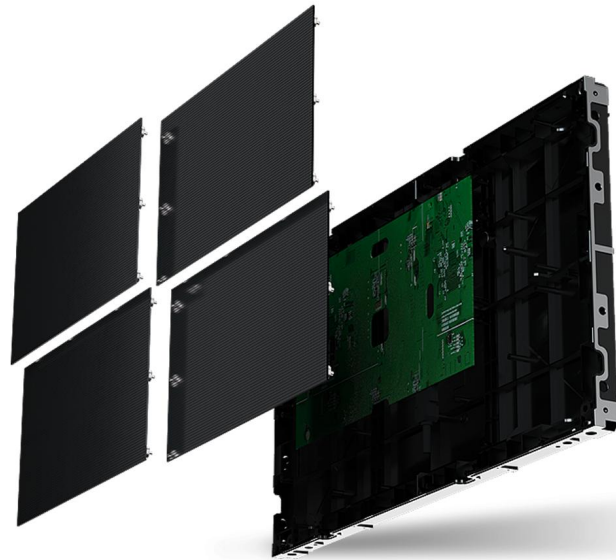

Vivid colors, delicate image quality

The F27 series adopts PWM driving chips, ensuring that the color and display details of the image are not lost even under low brightness conditions, and faithfully reproducing every frame detail.

16:9 standard ratio | 3840Hz refresh rate | High grayscale under low brightness


16:9 Standard Ratio



Slim design, simple but extraordinary

The cabinet is processed by high-precision CNC equipment and formed through integrated die-casting technology, easily achieving seamless optical splicing; the aluminum alloy cabinets allows for better heat dissipation of the screen, effectively extending its use life; With a high-integration design, the cabinet has a thickness of only 31mm.

31mm thickness | Full front access | Plugging Connection

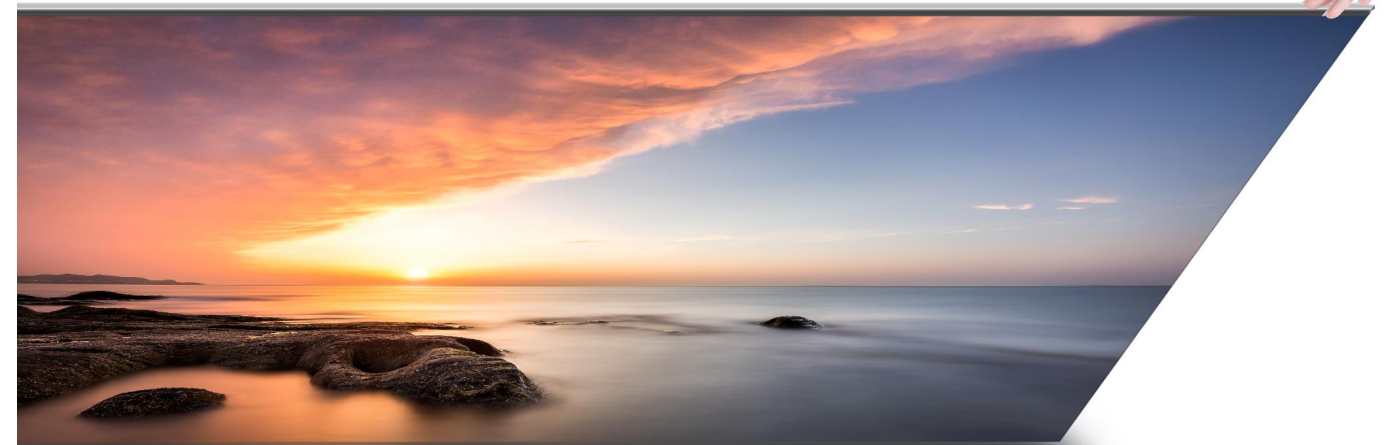

Multi system supported, easy to operate

The F27 series utilizes dynamic low-power technology to eliminate unnecessary power consumption, effectively reducing the overall temperature of the display screen.

Nova system | QSTECH system | Energy saving

*Android is built in QSTECH system.
The product's UI interface is subject to the actual products available for sale.

