

EVOKO ROOM MANAGER

In touch efficiency

Get to know the meeting intelligence of Evoko Room Manager

It's only a fingertip away. The Evoko Room Manager is the beautiful, touch-screen solution for all your meeting rooms. Making sure they're being used in a truly effective way. Book conference rooms easily and have all the information presented on the screen. No more confusion or double bookings. Use the statistics function to get decision-making support that really cuts costs. If you have rooms for improvement – get in touch with the Evoko Room Manager.

Clarity is key

See at a glance whether or not the room is vacant by the red or green backlight. Get information about the room and manage your meetings with ease directly on the screen. Do you want to have a spontaneous gathering or extend the meeting? No problem. If the room is occupied, the screen will refer you to another free room. Any non-functioning equipment? Simply report it on the screen. These are just a few aspects of clarity which the Evoko Room Manager brings. It's also a true eye-opener thanks to the full insight it gives into your organization's meeting patterns. A tool to optimize resources. Your key which will open the door to a new, more effective meeting culture.

So easy to handle – simple but smart

Book directly on your computer, smart-phone or tablet with your normal calendar. No plug-ins or additional software to learn. Everything is just the same as it has always been: only much smarter. The Evoko Room Manager has an intuitive user interface which can easily be mastered by anyone without prior training. All features can be reached with only a few simple touches. Bookings couldn't be easier. Touch. Schedule. Meet. Why complicate things?

Your existing network's best friend

Setting up the Evoko Room Manager is as easy as adding a new employee to the network. A patented pending solution integrates with the existing email server. No extra software or calendar plug-ins. No license fees, subscriptions or hidden costs. Power over Ethernet enables a neat, single-cable installation and the units are managed through the Evoko Control Panel. A secure and stable solution with minimal infringement on your IT infrastructure. As easy to install and manage as it is to use.



EVOKO ROOM MANAGER

Technical specifications

COMPATIBLE SERVER TYPES

- MS Exchange 2003¹
- MS Exchange 2007²
- MS Exchange 2010
- MS Exchange 2013
- MS Exchange 2016
- MS Office 365
- Google Apps for Work
- IBM/Lotus Domino 8.5.3 – 9.x
- IBM Domino/SmartCloud
- NFS

SYSTEM REQUIREMENTS

- Direct http/https access to compatible server.
- Make sure that no security functions or programs block or restrict the communication between the server and the Evoko Room Manager (i.e. domain control, firewalls, proxies, network logins etc.)
- Proper time and time zone settings on the server must be set.
- Some server types have its own specific requirements please check the manual for details.


TECHNICAL INFO

- Display: 8 inch resistive display with capacitive feeling
- Ethernet Controller: 10/100 Mbit
- Device Input Power Sources:
 - Power over Ethernet (PoE) - 48 V DC by RJ45
 - PoE PD Class 0 Specification³
Version: IEEE 802.3-2005 (previously 802.3af)
 - PoE Switch Power Output (per port):
 - Minimum 12.95 W
 - Maximum 15.40 W
 - AC-DC Adapter
 - 12 V DC by DC Jack, 300 mm cable
 - Approvals: CE, FCC, UL (US/C), GS, TÜV, CB, LPS.
- Connections:
 - USB: x1, Host, 1.5/12 Mbit, USB-A connector
 - RJ45: x1, Ethernet 10/100 Mbit, PoE
 - DC in: x1, 12 VDC
- MS Exchange communication ports: [\(80\)](http://(80)) and [\(443\)](https://(443))
- LED Type (status light): Hyper Red, Super Green
- Complies with RoHS directive
- CE and FCC approved
- User interface languages: Chinese (Simplified and Traditional), Czech, Danish, Dutch, English, Finnish, French, German, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Spanish (incl. Catalan and Galician), Swedish.
- Physical specification:
 - Frame and main casing: White coated aluminum alloy
 - Size: 270 x 192 x 39 mm
 - Weight: 1.3 kg
 - Recommended mounting height: 150 cm

¹ Not compatible with the EVO functionality of the software

² Service Pack 2 or later required to use the EVO functionality of the software

³ Please note that PoE + currently is not supported

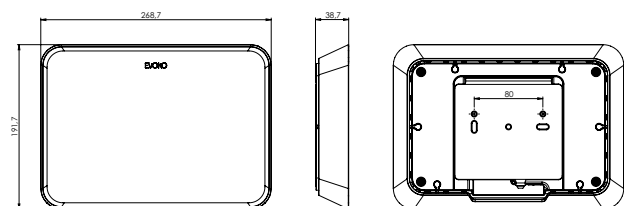

Smooth installation

Mount the units on the wall or a glass surface (both mounting kits are included in the box). PoE allows for single cable installation. No extra server needed. Thanks to Evoko's unique solution, no additional software needs to be installed on the servers or the users' computers.