

DIWAC

Digital programmable wall control
for AC12.8/AUDIOSYSTEM8.8



The DIWAC wall mount controller is ideal to control the AUDIOCONTROL12.8 in every single room. The wall mount controller is programmable via the host's unit's graphical installer interface to allocate the functionalities you need. Via the GII you can program the wall control to trigger macro's or even control 3rd party devices.

The Graphical Installer Interface has been developed to be extremely installer-friendly, this makes it possible for every integrator to configure the required unique solution.

The variety of installations where AUDIOCONTROL12.8 can be used is endless and only limited by the installer's creativity.


The DIWAC is configured as an audio controller with 'source select' and 'volume adjustment' buttons. There is the possibility to assign new functions. The LCD-display has 2 line - 12 character and has a timed (adjustable) white backlight.

DIWAC fits into most standard in-wall boxes such as our E-MODIN and N-MODIN. Easy mounting (no mounting tools required) on the wall chassis.

TECHNICAL SPECIFICATIONS

display	2 Line -12 Character LCD	display backlight	Yes
supported main unit	AUDIOCONTROL12.8	programmable functions	Yes
addressing	Hardwired	connector type	euroblock 2-pole
max. cable in mm ²	2.5	max. cable length in m	580
power type	Phantom	inputs	No
cut-out dimensions in mm	51 x 51	width in mm	83
height in mm	83	depth in mm	20
weight in kg	0.07	Net weight product in kg	0.07

MORE PICTURES

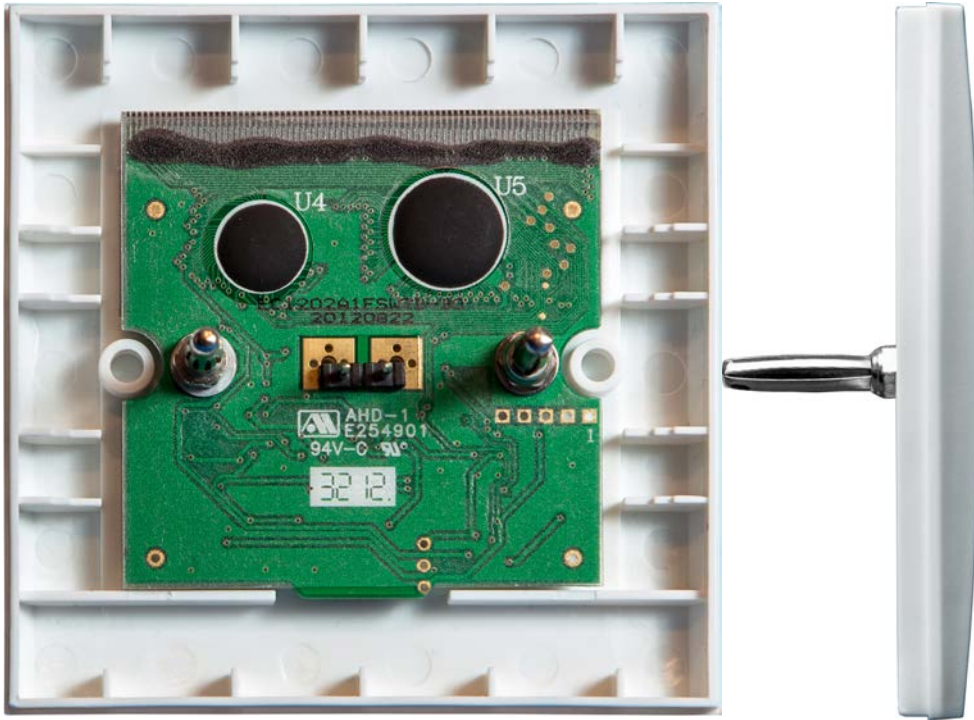

ACCESSORIES**N-MODIN**

Helia built-in box for wall controls

**E-MODIN**

Build-in box for Euro controls