

# EN-MP5T20-W

EN54-24 certified compact sound projector 20W



The EN-MP5T20-W is a compact and stylish sound projector made of powder coated aluminium (RAL 9010 equivalent), equipped with a high efficiency full range driver and a multi tap 100 volt transformer, all certified according EN 54-24. The unit is equipped with a ceramic speaker line connector block, junction box, thermal fuse and stainless installation bracket.

Equipped with a 5.25 inch woofer this IP65 rated sound projector is the stylish answer to all your background music, paging- and evacuation systems needs.

With a maximum of 20 watts at 100 volt this elegant speaker reaches twice the power of the EN-MP5T10-W.


## TECHNICAL SPECIFICATIONS

|                                            |               |                                      |                  |
|--------------------------------------------|---------------|--------------------------------------|------------------|
| outside diam. in mm                        | 140           | depth in mm                          | 183              |
| loudspeaker system                         | full range    | woofer size in inch                  | 5.25             |
| woofer cone material                       | coated paper  | mounting system                      | 2 screws         |
| colour                                     | white         | 100V transformer power taps in watts | 20 - 15 - 10 - 5 |
| SPL 1W/1m in dB                            | 92.1          | max SPL 1m in dB                     | 105.1            |
| frequency response in Hz                   | 120 - 23 k    | main construction material           | aluminium        |
| IP rating                                  | 65            | operating temperatures               | -40°C to +100°C  |
| applicable low impedance                   | no            | applicable in 100V                   | yes              |
| certificate ref                            | 1438/CPR/0356 | Vertical dispersion angle 1000 Hz    | 180°             |
| closest RAL colour (subject to deviations) | RAL9010       | Net weight product (kg)              | 2.48             |

## POLAR PLOTS


Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal  
Vertical

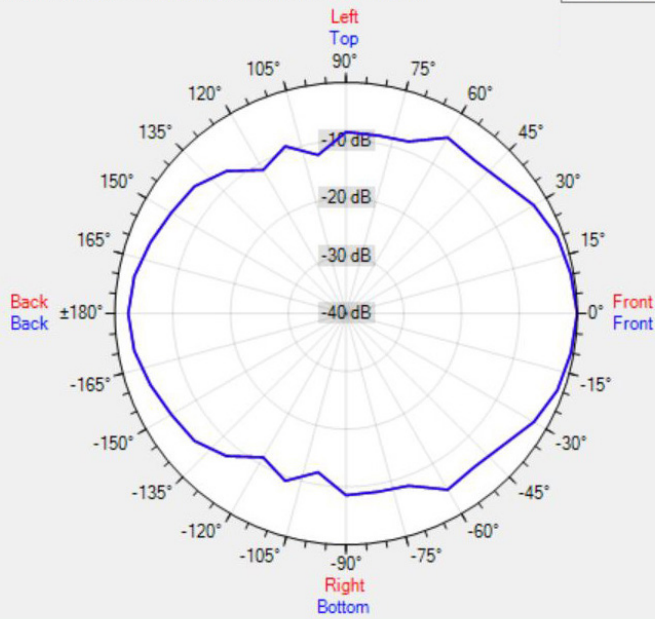


Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal  
Vertical

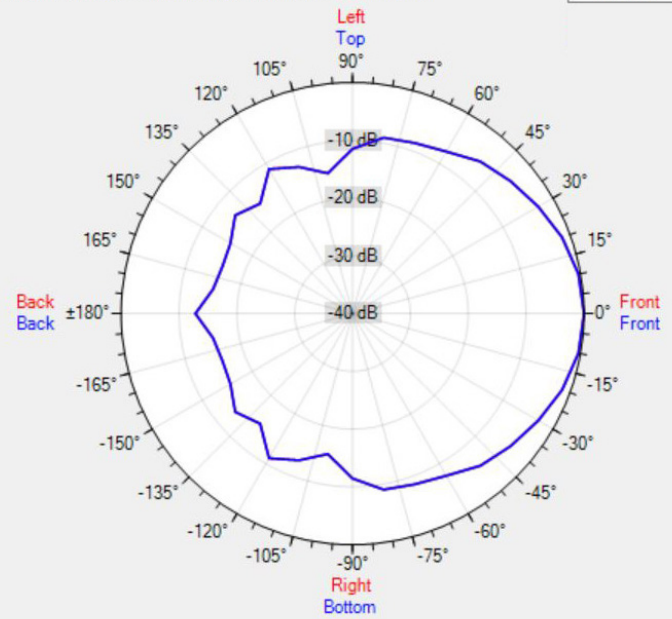


Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal  
Vertical

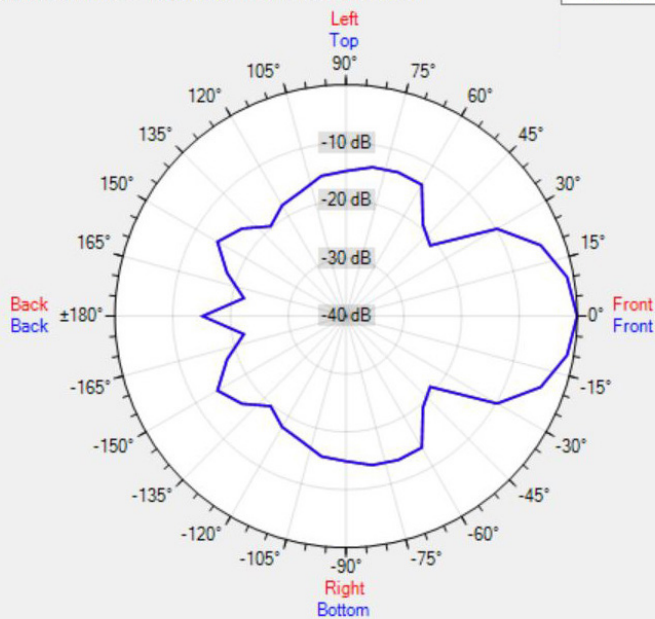

Data Shown: EN-MP5T20-W (APart Audio)  
Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal  
Vertical

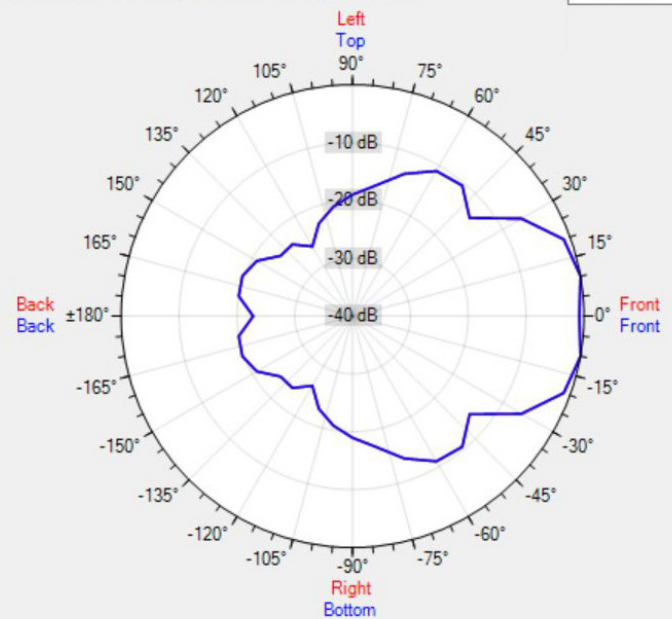

MORE PICTURES

